


PULASKI III SERIES

CEILING FIXTURE C6684

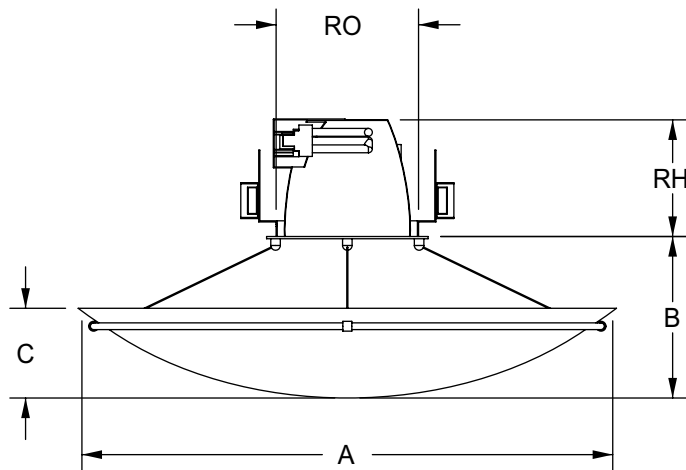

Fixture Number:

C6684-24

24" A x 8" B X 4" C
RO- 8.5625"
RH- 8.3125"

Ceiling Cutout- 9.25"

C6684-30

30" A x 9" B x 5" C
RO- 11.5"
RH- 9.75"

Ceiling Cutout- 12.125"

Lamping:

C6684-24

F 2-26W TT
FF 2-42W TT

C6684-30

F 2-57W TT
FF 1-70W TT

Voltage:

1 120v
2 277v

Lens Options:

WA White Acrylic
WS White Alabaster Acrylic
FA Beige Alabaster Acrylic
GR Grey Alabaster Acrylic
CA Custom Acrylic (see pg 398)
HPA Hand Painted Acrylic

Finish Options:

AB Antique Brass
PB Polished Brass
BB Brushed Brass
BA Brushed Aluminum
SN Satin Nickel
PC Polished Chrome
PT Painted (see pg 396)
CPF Custom Painted Finish

Options:

REM Remote Emergency Ballast
DM Dimming Ballast
FUS Fusing
SBA Sandblasted Acrylic

Notes:

1. Custom sizes and finishes available upon request.
2. All fluorescent fixtures available in 120v or 277v.
3. Incandescent 120v only.
4. Lamps not included.
5. For lamp or ballast specifications see pages 400-403 for technical information.
6. Camman reserves the right to make design changes without prior notice.

Mounting Frame:

16-gauge galvanized steel mounting ring with factory installed spring friction clips. Accommodates ceilings up to 3/4" thick; accessories available for ceilings up to 2".

Mounting Bracket:

MB1-25" Tru-Lock Grid Bar Hangers.
MB2-52" C-Channel Bar Hangers.
MB3-28" C-Channel Bar Hangers.
MB4-27" Linear Bar Hangers

Project:

Quantity: Type:

Modifications:

Specification:

(Fixture Number)

(Lamping)

(Voltage)

(Lens)

(Finish)

(Options)