


DELAWARE SERIES

PENDANT FIXTURE P515

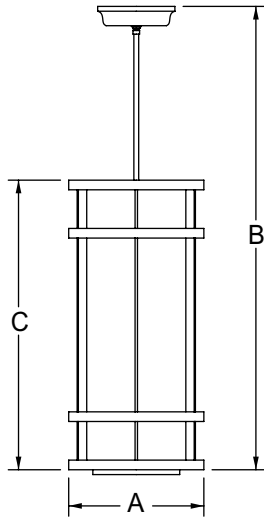

APPLICATIONS

PENDANT

WALL

CEILING

CHURCH

FINISH OPTIONS

TECHNICAL

Fixture Number:

P515-24

14" A x 48" B x 24" C

Lamping:

P515-24

- I** 6-60W A19
1-250W PAR38 FL
- F** 4-39W BX
1-250W PAR38 FL
- N** 4-39W BX

Lens Options:

- WA** White Acrylic
- CA** Custom Acrylic (see pg 398)
- HPA** Hand Painted Acrylic

Notes:

1. Custom sizes and finishes available upon request.
2. All fluorescent fixtures available in 120v or 277v.
3. Incandescent 120v only.
4. Lamps not included.
5. For lamp or ballast specifications see pages 400-403 for technical information.
6. Camman reserves the right to make design changes without prior notice.

P515-30

14" A x 54" B x 30" C

P515-30

- I** 6-60W A19
1-500W R40 FL
- F** 4-39W BX
1-500W R40 FL
- N** 4-39W BX

Finish Options:

- AB** Antique Brass
- PB** Polished Brass
- BB** Brushed Brass
- BA** Brushed Aluminum
- SN** Satin Nickel
- PC** Polished Chrome
- PT** Painted (see pg 396)
- CPF** Custom Painted Finish

P515-36

14" A x 60" B x 36" C

P515-36

- I** 6-60W A19
1-500W R40 FL
- F** 4-40W BX
1-500W R40 FL
- N** 4-40W BX

Options:

- IEM** Integral Emergency Ballast
- SMC** Swivel Canopy 45 Degree
- DM** Dimming Ballast
- SBC** Surface Mounted Canopy for Ballast
- OAH** Overall Height of Fixture in Inches
- FUS** Fusing
- SBA** Sandblasted Acrylic

Voltage:

- 1 120v
- 2 277v

Project:

Quantity: **Type:**

Modifications:

Specification:

(Fixture Number)

(Lamping)

(Voltage)

(Lens)

(Finish)

(Options)